

Specific Towing instructions:

### **Winnebago**


For towing this Caravan you will need any tow vehicle with a 50 mm tow ball and tow capacity of 2500kg and above.

- Winnebago caravans are installed with AL-KO 10 inch electric drum brakes.
- The caravan will require an electric brake controller to be installed in the tow vehicle.
- Caravans are fitted with a standard 12 pin trailer plug. Adaptors are available and will enable connection if the tow vehicle has a 7 pin round or 7 pin flat trailer plug. Please note if the tow vehicle is not fitted with a 12 pin trailer connection, the fridge and battery charger may not work whilst the vehicle is being towed.

### **Adria**

For towing this Caravan you will need any tow vehicle with a 50 mm tow ball and tow capacity of 1600kg and above.

- Adria caravans are installed with AL-KO override Brake Coupling.
- The vehicle towing the caravan will NOT require an electric brake controller to be installed.
- Caravans are fitted with a standard 12 pin trailer plug. Adaptors are available and will enable connection if the tow vehicle has a 7 pin round or 7 pin flat trailer plug. Please note if the tow vehicle is not fitted with a 12 pin trailer connection, the fridge and battery charger may not work whilst the vehicle is being towed.

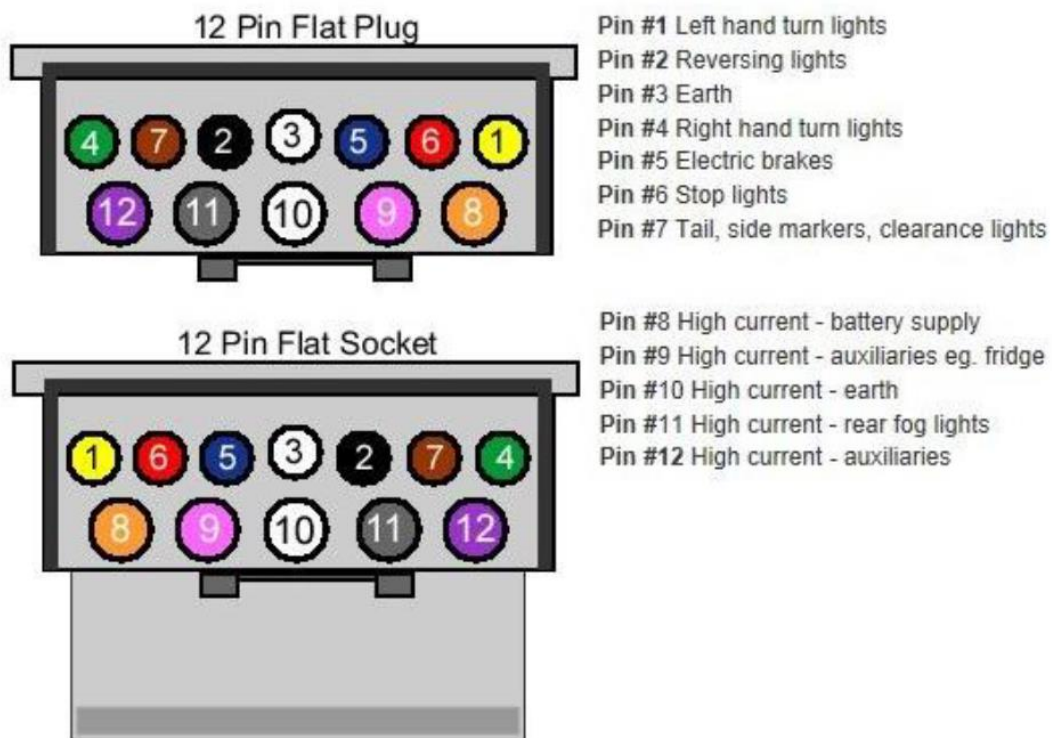

Please ensure the height of the clients tow ball sits within recommended limits for safe towing. From ground to the centre of the tow ball should be between 580-600 mm high. The caravan tow level will always be slightly 'nose-down', not perfectly levelled.